


Series
2000


Magnehelic® Differential Pressure Gages

Indicate positive, negative or differential. Accurate within 2%.

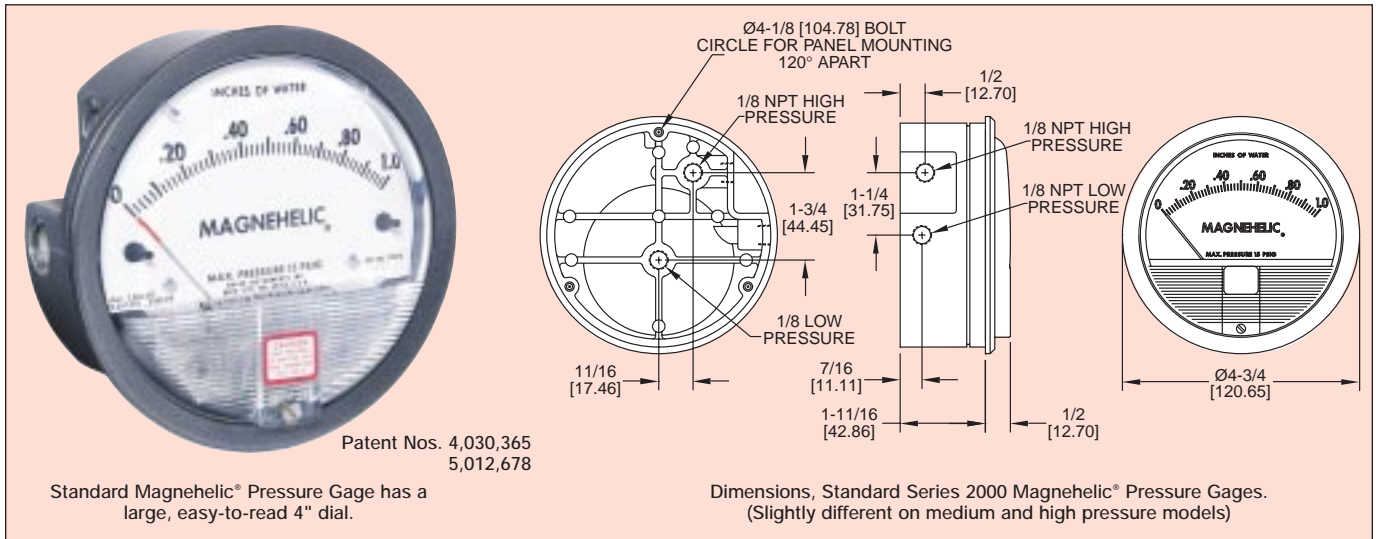

Select the Dwyer Magnehelic® gage for high accuracy — guaranteed within 2% of full scale — and for the wide choice of 81 ranges available to suit your needs precisely. Using Dwyer's simple, frictionless Magnehelic® movement, it quickly indicates low air or non-corrosive gas pressures — either positive, negative (vacuum) or differential. The design resists shock, vibration and over-pressures. No manometer fluid to evaporate, freeze or cause toxic or leveling problems. It's inexpensive, too.

Widely used to measure fan and blower pressures, filter resistance, air velocity, furnace draft, pressure drop across orifice plates, liquid levels with bubbler systems and pressures in fluid amplifier or fluidic systems. It also checks gas-air ratio controls and automatic valves, and monitors blood and respiratory pressures in medical care equipment.

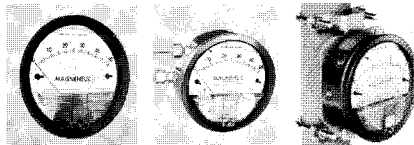

Flush ...Surface...or Pipe Mounted

MOUNTING. A single case size is used for most ranges of Magnehelic® gages. They can be flush or surface mounted with standard hardware supplied. With the optional A-610 Pipe Mounting Kit they may be conveniently installed on horizontal or vertical 1½" - 2" pipe. Although calibrated for vertical position, many ranges above 1" may be used at any angle by simply re-zeroing. However, for maximum accuracy, they must be calibrated in the same position in which they are used. These characteristics make Magnehelic® gages ideal for both stationary and portable applications. A 4⅜" hole is required for flush panel mounting. Complete mounting and connection fittings plus instructions are furnished with each instrument.

VENT VALVES

In applications where pressure is continuous and the Magnehelic® gage is connected by metal or plastic tubing which cannot be easily removed, we suggest using Dwyer A-310A vent valves to connect gage. Pressure can then be removed to check or re-zero the gage.

HIGH AND MEDIUM PRESSURE MODELS

Installation is similar to standard gages except that a 4⅜" hole is needed for flush mounting. The medium pressure construction is rated for internal pressures up to 35 psig and the high pressure up to 80 psig. Available in all ranges. Because of larger case, will not fit in portable case. Weight 1 lb., 10 oz (Installation of the A-321 safety relief valve on standard Magnehelic® gages often provides adequate protection against infrequent overpressure.

PHYSICAL DATA

Ambient temperature range: 20° to 140°F* (-7° to 60°C).
Rated total pressure: -20" Hg. to 15 psig† (-68 kPa to 103 kPa).

Overpressure: Relief plug opens at approximately 25 psig (172 kPa).

Connections: ⅜" NPT(F) high and low pressure taps, duplicated — one pair side and one pair back.

Housing: Die cast aluminum. Case and aluminum parts iridite-dipped to withstand 168 hour salt spray test. Exterior finish is dark gray.

Accuracy: Plus or minus 2% of full scale (3% on -0 and 4% on -00 ranges), throughout range at 70°F (21°C).

Standard accessories: Two ⅜" NPT plugs for duplicate pressure taps, two ⅜" pipe thread to rubber tubing adapters and three flush mounting adapters with screws. (Mounting ring and snap ring retainer substituted for 3 adapters in MP & HP gage accessories.)

Weight: 1 lb. 2 oz. (460 g)

*Low temperature models available as special option.
†For applications with high cycle rate within gage total pressure rating, next higher rating is recommended. See Medium and High pressure options at lower left.

OPTIONS AND ACCESSORIES

Transparent overlays

Furnished in red and green to highlight and emphasize critical pressures.

Adjustable signal flag

Integral with plastic gage cover. Available for most ranges except those with medium or high pressure construction. Can be ordered with gage or separate

LED Setpoint Indicator

Bright red LED on right of scale shows when setpoint is reached. Field adjustable from gage face, unit operates on 12-24 VDC. Requires MP or HP style cover and bezel

Portable units

Combine carrying case with any Magnehelic® gage of standard range (not high pressure). Includes 9 ft. (2.7 m) of ⅜" I.D. rubber tubing, standhang bracket and terminal tube with holder

Air filter gage accessory package

Adapts any standard Magnehelic® for use as an air filter gage. Includes aluminum surface mounting bracket with screws, two 5 ft. (1.5 m) lengths of ⅜" aluminum tubing two static pressure taps and two molded plastic vent valves, integral compression fittings on both tips and valves

Quality design and construction features

Bezel provides flange for flush mounting in panel.

Clear plastic face is highly resistant to breakage. Provides undistorted viewing of pointer and scale.

Precision litho-printed scale is accurate and easy to read.


Red tipped pointer of heat treated aluminum tubing is easy to see. It is rigidly mounted on helix shaft.

Pointer stops of molded rubber prevent pointer over-travel without damage.

“Wishbone” assembly provides mounting for helix, helix bearings and pointer shaft.

Jeweled bearings are shock-resistant mounted; provide virtually friction-free motion for helix. Motion damped with high viscosity silicone fluid.

Zero adjustment screw is conveniently located in plastic cover, accessible without removing cover. O-ring seal provides pressure tightness.

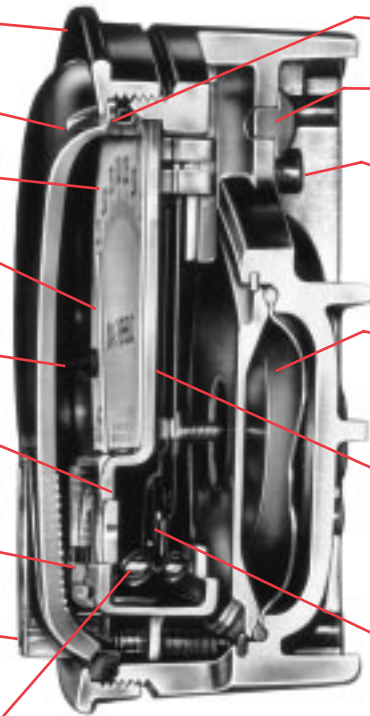

O-ring seal for cover assures pressure integrity of case.

Blowout plug of silicone rubber protects against overpressure on 15 PSIG rated models. Opens at approximately 25 PSIG.

Die cast aluminum case is precision made. Iridite-dipped to withstand 168 hour salt spray test. Exterior finished in baked dark gray hammerloid. One case size used for all standard pressure ranges, and for both surface and flush mounting.

Silicone rubber diaphragm with integrally molded O-ring is supported by front and rear plates. It is locked and sealed in position with a sealing plate and retaining ring. Diaphragm motion is restricted to prevent damage due to overpressures.

Calibrated range spring is flat spring steel. Small amplitude of motion assures consistency and long life. It reacts to pressure on diaphragm. Live length adjustable for calibration.

Samarium Cobalt magnet mounted at one end of range spring rotates helix without mechanical linkages.

Helix is precision milled from an alloy of high magnetic permeability. Mounted in jeweled bearings, it turns freely to align with magnetic field of magnet to transmit pressure indication to pointer.

SERIES 2000 MAGNEHELIC® — MODELS AND RANGES STOCKED MODELS in bold

The models below will fulfill most requirements. Page 4 also shows examples of special models built for OEM customers. For special scales furnished in ounces per square inch, inches of mercury, metric units, etc., contact the factory.

Dual Scale English/Metric Models		
Model Number	Range, In. W.C.	Range, Pa or kPa
2000-0D	0-0.5	0-125 Pa
2001D	0-1.0	0-250 Pa
2002D	0-2.0	0-500 Pa
2003D	0-3.0	0-700 Pa
2004D	0-4.0	0-1.0 kPa
2006D	0-6.0	0-1.5 kPa
2008D	0-8.0	0-2.0 kPa
2010D	0-10	0-2.5 kPa

Model Number	Range Inches of Water	Model Number	Range Zero Center Inches of Water	Dual Scale Air Velocity Units		Model Number	Range, CM of Water	Model Number	Range, Pascals	
				Model Number	Range in W.C.I Velocity, F.P.M.					Model Number
2000-00†	0-.25	2300-0†	.25-0-.25	2000-00AV	0-.25/300-2000	2000-15CM	0-15	2000-60 Pa†	0-60	
2000-0†	0-.50	2301	.5-0-.5	2000-0AV	0-.50/500-2800	2000-20CM	0-20	2000-125 Pa†	0-125	
2001	0-1.0	2302	1-0-1	2001AV	0-1.0/500-4000	2000-25CM	0-25	2000-250 Pa	0-250	
2002	0-2.0	2304	2-0-2	2002AV	0-2.0/1000-5600	2000-50CM	0-50	2000-500 Pa	0-500	
2003	0-3.0	2310	5-0-5	2010AV	0-10/2000-12500	2000-80CM	0-80	2000-750 Pa	0-700	
2004	0-4.0	2320	10-0-10	For use with pitot tube.		2000-100CM	0-100	Zero Center Ranges		
2005	0-5.0	2330	15-0-15	Model Number	Range MM of Water	2000-150CM	0-150	2300-250 Pa	125-0-125	
2006	0-6.0					2000-200CM	0-200	2300-500 Pa	250-0-250	
2008	0-8.0					2000-250CM	0-250	Model Number	Range, Kilopascals	
2010	0-10					2000-300CM	0-300	2000-1 kPa	0-1	
2015	0-15	2201	0-1	2000-6MM†	0-6	Zero Center Ranges		2000-1.5 kPa	0-1.5	
2020	0-20	2202	0-2	2000-10MM	0-10	2300-4CM	2-0-2	2000-2 kPa	0-2	
2025	0-25	2203	0-3	2000-25MM	0-25	2300-10CM	5-0-5	2000-3 kPa	0-3	
2030	0-30	2204	0-4	2000-50MM	0-50	2300-30CM	15-0-15	2000-4 kPa	0-4	
2040	0-40	2205	0-5	2000-80MM	0-80	†These ranges calibrated for vertical scale position.			2000-5 kPa	0-5
2050	0-50	2210*	0-10	2000-100MM	0-100				2000-8 kPa	0-8
2060	0-60	2215*	0-15	Zero Center Ranges					2000-10 kPa	0-10
2080	0-80	2220*	0-20	2300-20MM†	10-0-10				2000-15 kPa	0-15
2100	0-100	2230**	0-30			2000-20 kPa	0-20	2000-25 kPa	0-25	
2150	0-150					2000-30 kPa	0-30	Zero Center Ranges		
Accessories		Options — To order, add suffix: I.E. 2001-ASF		Special Purpose Ranges						
A-310A, 3-Way Vent Valve.....		ASF (Adjustable Signal Flag)		Scale No. 2401		Scale No. 2402				
A-321, Safety Relief Valve.....		HP (High Pressure Option)		Square Root		Blank Scale				
A-432, Portable Kit.....		LT (Low Temperatures to -20°F)		Specify Range		Specify Range				
A-605, Air Filter Kit.....		MP (Med. Pressure Option)		Model 2000-00N. range -.05 to +.20" W.C. For room pressure monitoring						
A-610, Pipe Mount Kit		SP (Setpoint Indicator)								
Scale Overlays — Red, Green, Mirrored or Combination, Specify Locations										